

Application :Wall Mounted Safety Shower.To use attach to the shower head.Activated by pull rod.

Shower Head:10" diameter head provide water flow.


Shower Valve:1" IPS chrome plated brass valve.  
Valve is activated by pull rod.

Pipe and Fittings:Schedule 1" and 1/4" galvanized steel .  
Furnished with green polyethylene covers for vertical piping for corrosion resistance.

Supply:1-1/4" NPT female inlet.

Waste:1-1/4"NPT female outlet.

Quality Assurance:Valve and Shower head assembly is factory assembled.

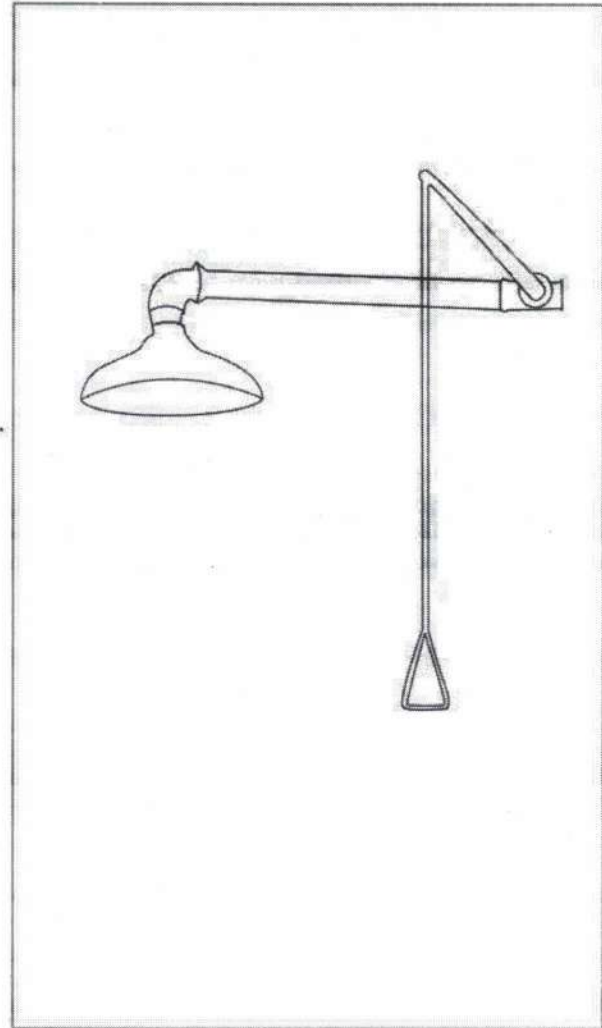

### Product Feature

- Connect unit to uninterruptible water supply capable.Of delivering required flow when all components are operated simultaneously.
- Shower can provide 76 liters of water per minute.
- Center of the water pattern 16" from any obstructions.
- Large area cover of water flow,at 60",the water pattern cover 20" in diameter.
- Ball valve activates within one second.
- Easily located,accessible actuator no higher than 69".
- Controlled,low velocity flow completely rinses eyes and face is not injurious to user.

Safety Shower Details Parts Listing

	Part Name	Description	Pieces
<b>A</b>	Shower Head	Plastic Shower Head	1 piece
<b>B</b>	Shower Valve	Chrome Plated Brass	1 piece
<b>C</b>	Pull Rod	Stainless Steel	1 piece
<b>D</b>	Shower Connection Pipe	1" Galvanized Steel	1 piece

