

**Application:** Wall Mounted Eye Washer is using in rushing to deal with an emergency, quickly cleaning the deleterious material which attached to eyes.

**Spray Head Assembly:** Two spray heads. Each head has a dust cover, internal flow control and filter to remove impurities from the water flow.

**Valve:** 3/8" IPS chrome plated brass stay-open ball valve. Valve is activated by flag handle. Unit remains in operation until handle is returned to closed position.


**Eye Wash Bowl:** 11-1/2" diameter. Bowl is ABS plastic.

**Pipe and Fittings:** Schedule 1" and 1/4" galvanized steel. Furnished with green polyethylene covers for vertical piping for corrosion resistance.

**Supply:** 1-1/4" NPT female inlet.

**Waste:** 1-1/4" NPT female outlet.

**Quality Assurance:** Valve, bowl and spray head assembly is factory assembled.

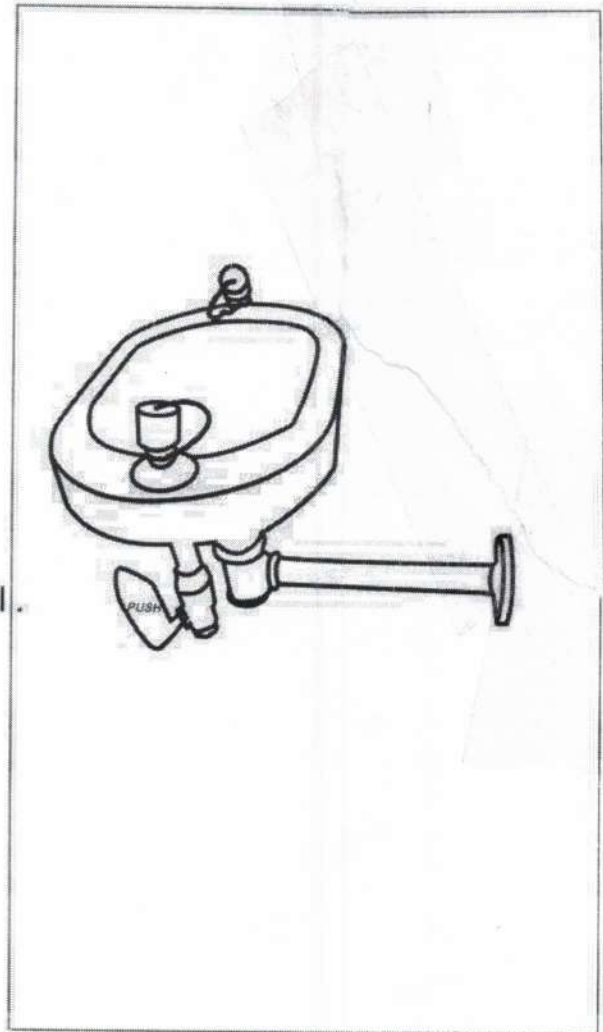


### Product Feature

- Controlled, low velocity flow completely rinses eyes and face is not injurious to user.
- Eye washer unit deliver 11.5 liters of water per minute.
- Outlet heads position meets 89/686/EEC and ANSI Z358.1-2014, DIN 12899 and UNI-9608-4.1990 standard.
- Protect spray heads from airborne contaminants.
- Valve actuator are easy to locate and readily accessible to user.
- Hands-free stay open valve activate within one second.
- Connect unit to uninterruptible water supply delivering at 3 GPM.

Eye Washer Details Set Parts Listing

	Part Name	Description	Pieces
<b>A</b>	Basin	ABS Plastic	1 piece
<b>B</b>	Drain Plate	Drain plate, Cupped washer, and Gasket	1 each ( total 3 pieces )
<b>C</b>	Spray Head	Chrome plated brass fittings	2 pieces
<b>D</b>	Eyewash Shank	3/8" Brass shank	1 piece
<b>E</b>	Dust Cover	Plastic dust cover	2 pieces
<b>F</b>	Ball Valve	Chrome plated brass valve	1 piece
<b>G</b>	Hose	Hose	1 piece
<b>H</b>	Hand Control Panel	Cast Iron	1 piece

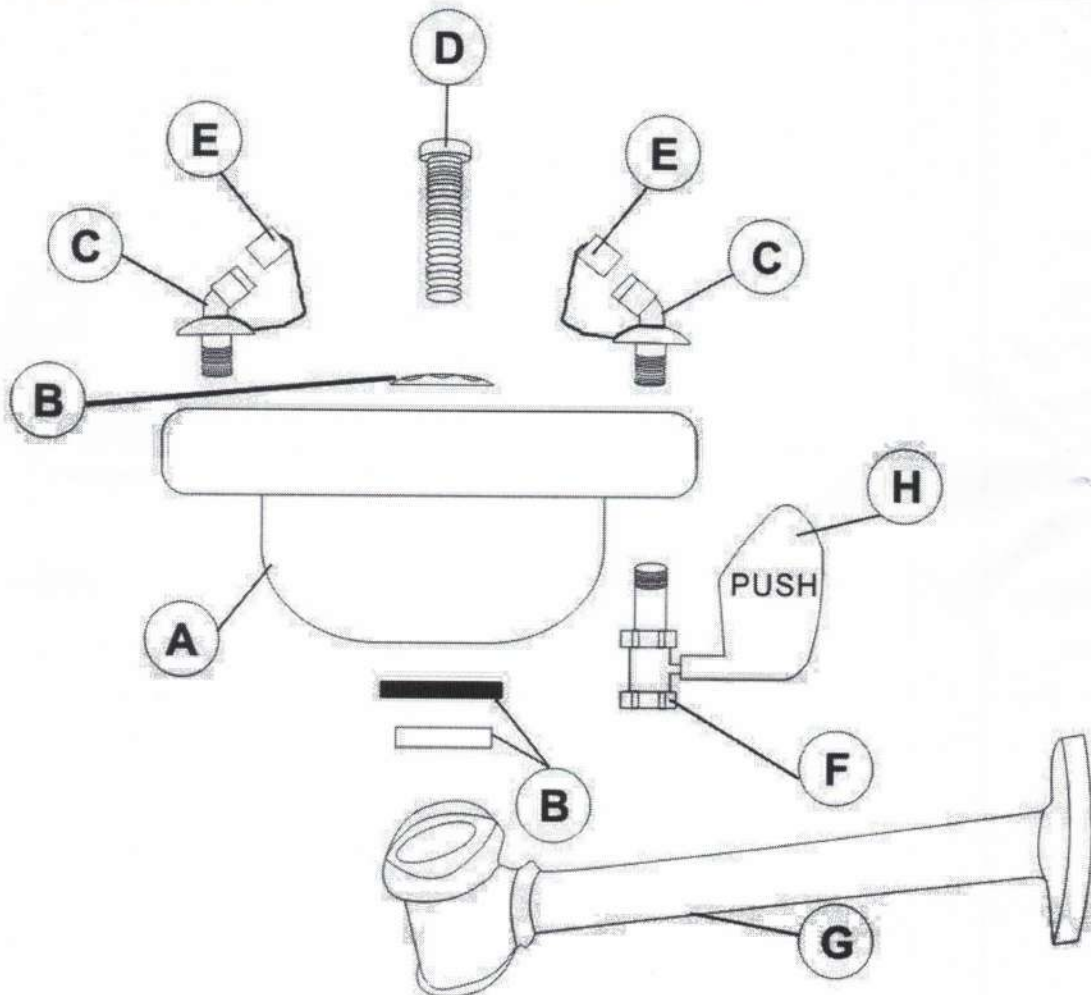

Eye Washer parts details